

Closed loop

Recovery of acid allows wastewater treatment to be cut by up to 90 percent

An important step of industrial processes is the reprocessing of used acids and water with a view to recovering the acid contained in them. Such a recovery allows wastewater treatment to be cut by up to 90 percent. This clearly means substantially less environmental pollution and a corresponding reduction in costs, as less acid – the raw material required for the process – needs to be purchased.

THOMAS SCHULZ

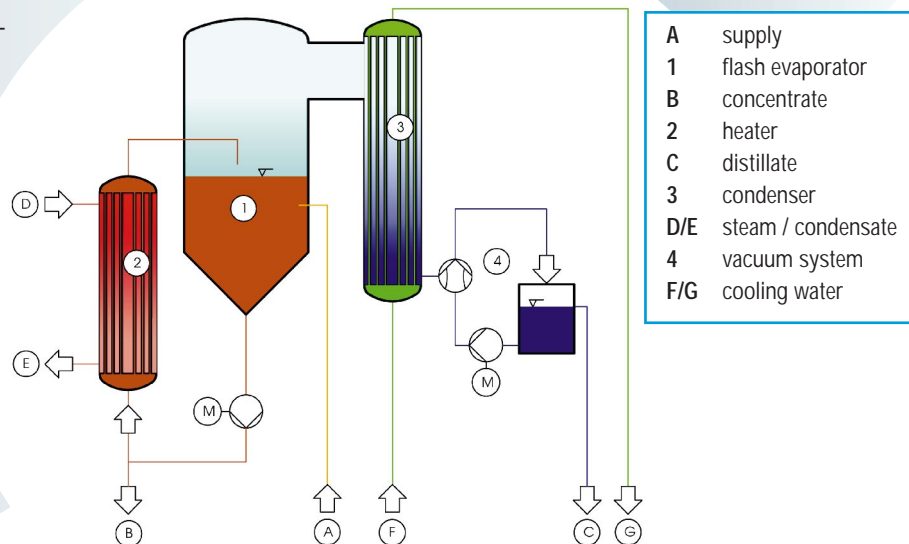


Figure: Schulz + Partner

With its long-standing tradition dating back to 1834, the F.X. Nachtmann Company ranks among the leading manufacturers of lead crystal and crystal glass. An important process in the lead-crystal manufacturing business is chemical mirror finishing, which takes after the glass has been diamond ground. The process uses a mixture of sulfuric acid (65 weight percent) and hydrofluoric acid (1.5 weight percent). Chemical machining not only leads to defined substrate surfaces but also has a positive influence on the corrosion resistance of the glass. Acid polishing is a multi-stage process, with a two-step pretreatment (cleaning, degreasing) followed by the actual polishing in a polishing bath. Subsequently, the glasses are washed in a three-stage rinsing cascade.

The task

The goal was to close chemical substance circuits as part of measures designed to optimize the plant. An important step here is the reprocessing of used acids and rinse waters with a view to recovering the sulfuric acid contained in them. However, the sulfuric acid can only be used for the regeneration of the polishing bath if a minimum concentration of 85 weight percent is achieved. Such a recovery allows

wastewater treatment (neutralization) to be cut by up to 90%. This clearly means substantially less environmental pollution and a corresponding reduction in costs, as less sulfuric acid – the raw material required for regenerating the process solution – needs to be purchased.

The solution

The reprocessing requirements can only be met by an evaporating plant that is both efficient and corrosion-resistant. German based engineering company Schulz+Partner developed a steam-heated forced-circulation evaporator that satisfies these requirements. Evaporation must take place under vacuum, as sulfuric acid at the required concentration would have a boiling point of over 230 °C under normal atmospheric pressure, while the appropriate plant materials can only be used for a temperature of approx. 140 °C at a maximum.

The required vacuum is generated by a vacuum pump with a level-controlled cooling circuit and is controlled by a vacuum meter. The process solutions to be treated are



The process solutions to be treated are sucked into the concentration stage. A circulation pump then transfers the medium into the evaporator. In the evaporator, the heated solution expands. Subsequently, the steam is liquefied in a separate condensation stage and is then discharged from the evaporator by a condensate pump on a level-controlled basis. The required degree of concentration is monitored radiometrically.

The author is general manager at Schulz + Partner, Umklich, Germany

Weight assessment of the evaporating plant:

	Unit	Feed	Concentrate	Distillate
Density	kg/l	1.32	1.78	1.00
H ₂ SO ₄ concentration	weight %	41.5	84.5	max. 3
H ₂ SO ₄ concentration	g/l	550	1500	max. 31
Volume flow	l/h	210	76	134

sucked into the concentration stage by a vacuum of 30 mbar generated by the vacuum system. A circulation pump then transfers the medium into the evaporator by way of an external heat exchanger. In the evaporator, the heated solution expands, with part of it evaporating at a boiling temperature of approximately 135 °C. Subsequently, the steam is liquefied in a separate condensation stage and is then discharged from the evaporator by a condensate pump on a level-controlled basis.

The required degree of concentration is monitored radiometrically. A pump discharges the concentrate on a discontinuous basis. A gas-heated steam generator supplies the plant with the necessary heating energy. The cooling water required for

condensation is generated by a cold-water aggregate delivered with the plant. The plant runs automatically and is controlled via a stored-program controller (SPC) allowing process visualization. All operating data are stored and shown on a graphic display. Owing to the high chemical aggressiveness of all of the solutions used in the plant, special materials had to be used in its construction. The entire heat exchanger is made of silicon carbide, and all of the plant sections that

come in contact with the product feature a PTFE/PFA coating. Selecting the appropriate process measuring and control technology was particularly difficult because such high temperatures are involved.

Summary

The plant has been in operation since early 2000. It ensures a closed circuit for most of the chemical substances used in the acid polishing process. The high concentration of the product and especially the high corrosion requirements call for a customized technology posing special engineering demands. The desired savings in wastewater treatment, together with a substantial reduction in the resulting quantity of waste (neutralization gypsum), ensure a very fast payback. ■

For further information:

www.process-worldwide.com

- List of realized process optimization projects

Contact:

info@schulzpartner.com

ACHEMA Hall 4.0, Stand F5